


SD 04R01B01-01EN

Unit: mm  
(approx. inch)



• 2-inch vertical pipe mounting

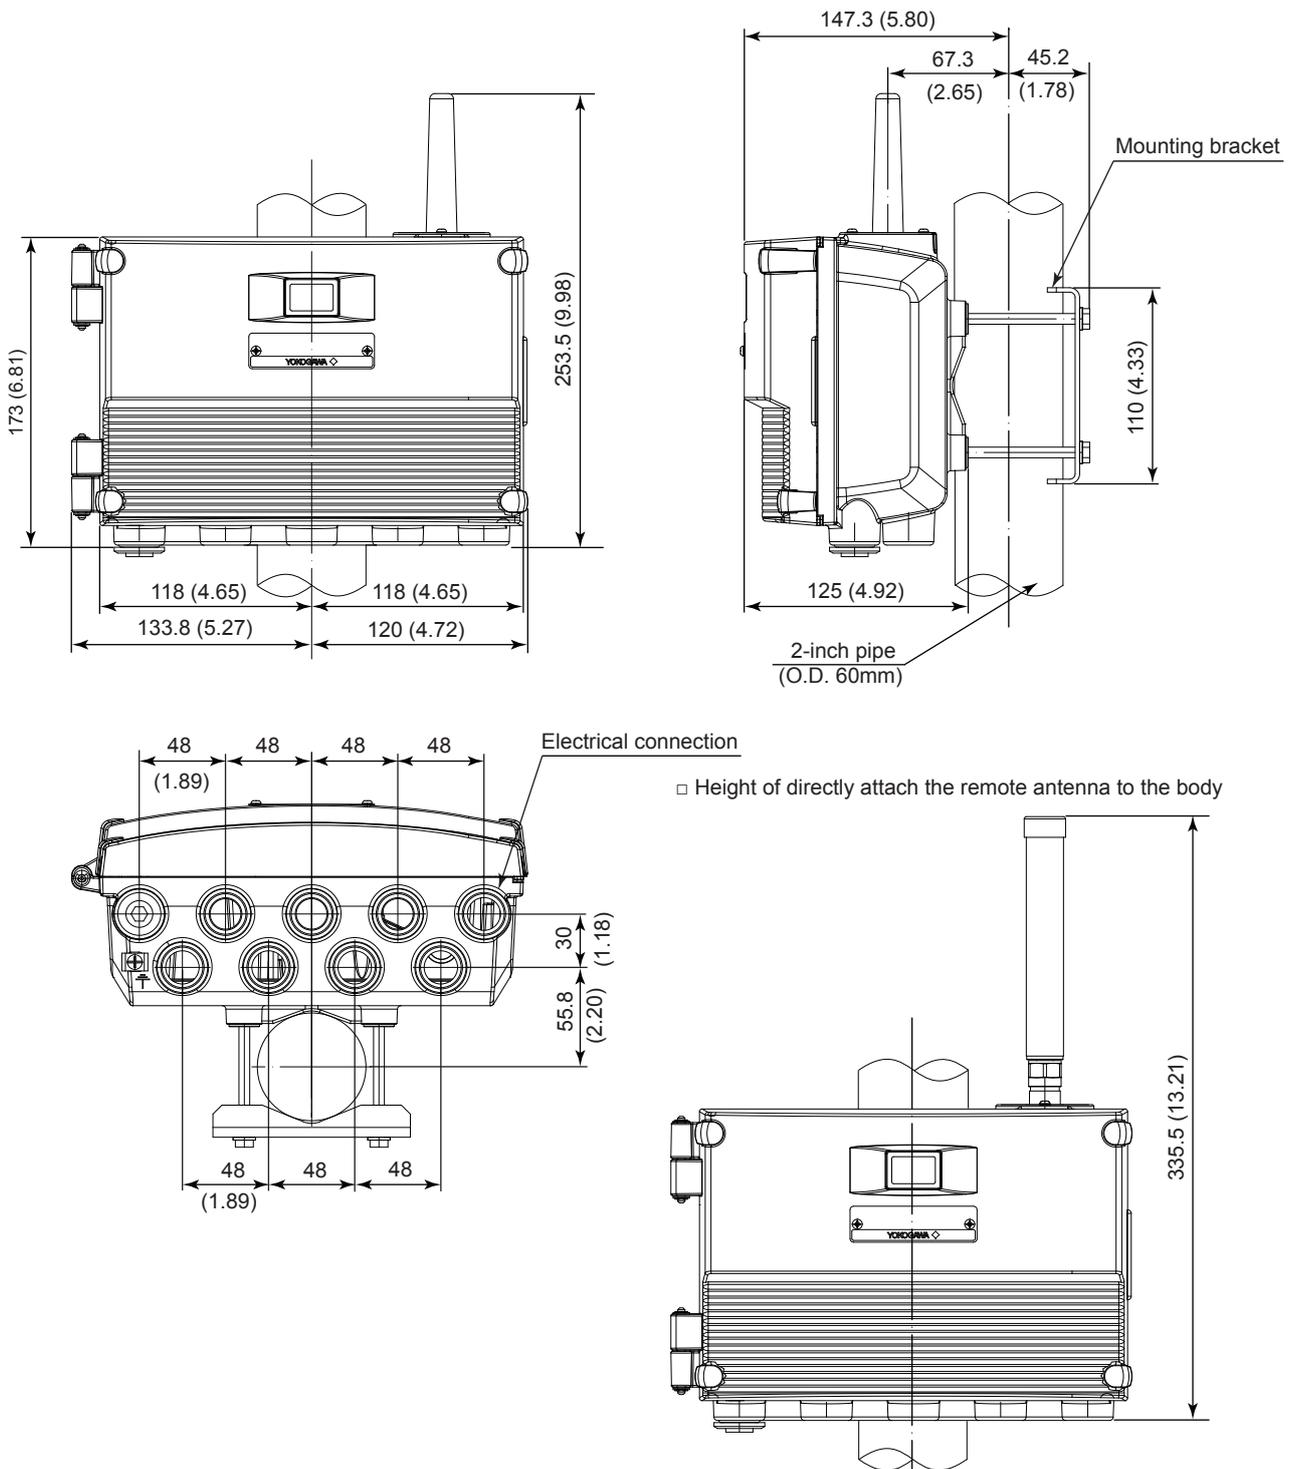

If not specified, the tolerance is  $\pm 3\%$ . However, in cases of less than 10 mm, the tolerance is  $\pm 3$  mm.


Unit: mm  
(approx. inch)

● 2-inch horizontal pipe mounting

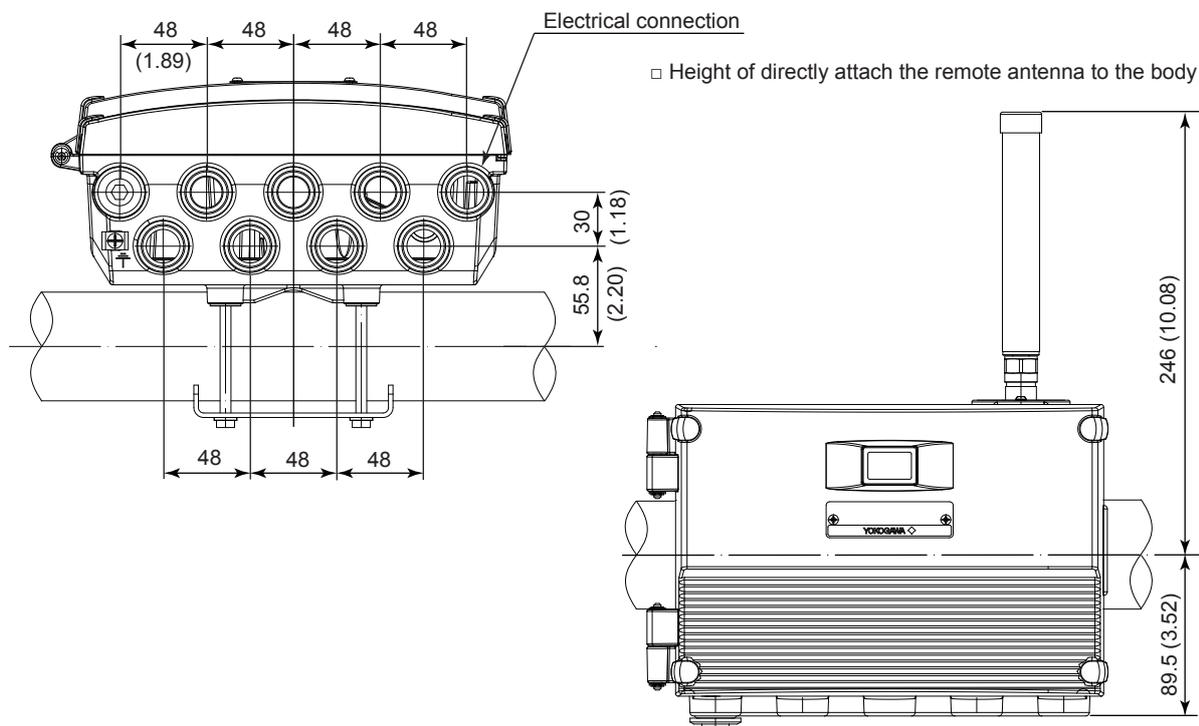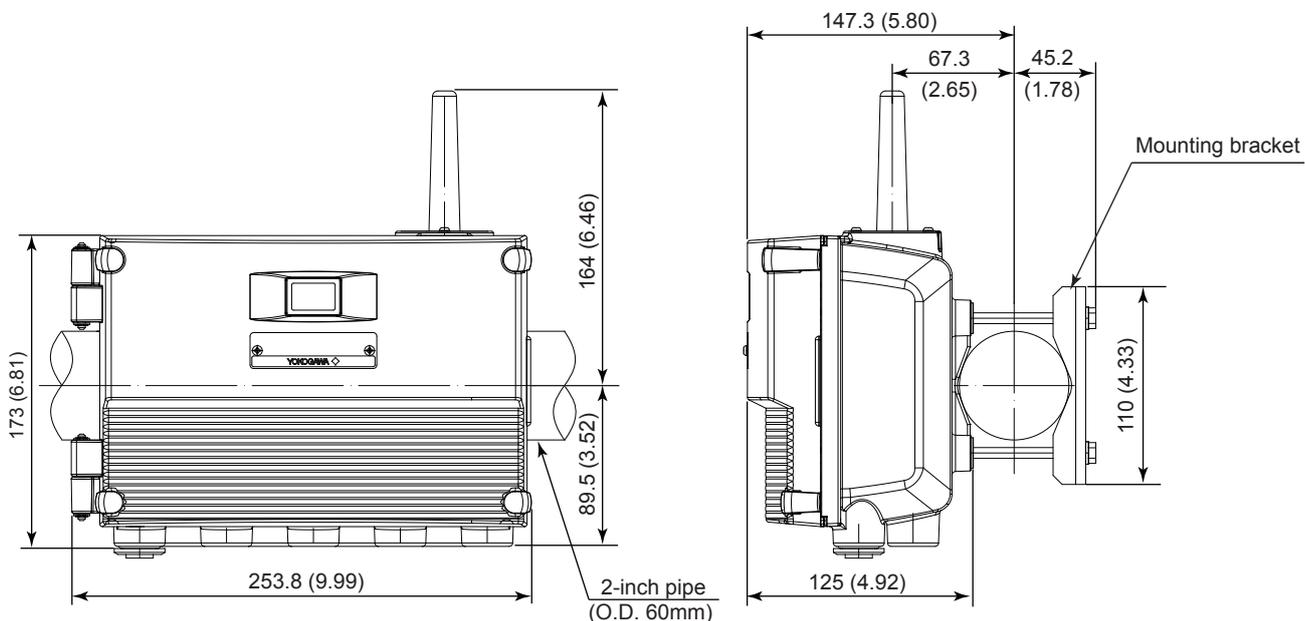


If not specified, the tolerance is  $\pm 3\%$ . However, in cases of less than 10 mm, the tolerance is  $\pm 3$  mm.

● Wall mounting

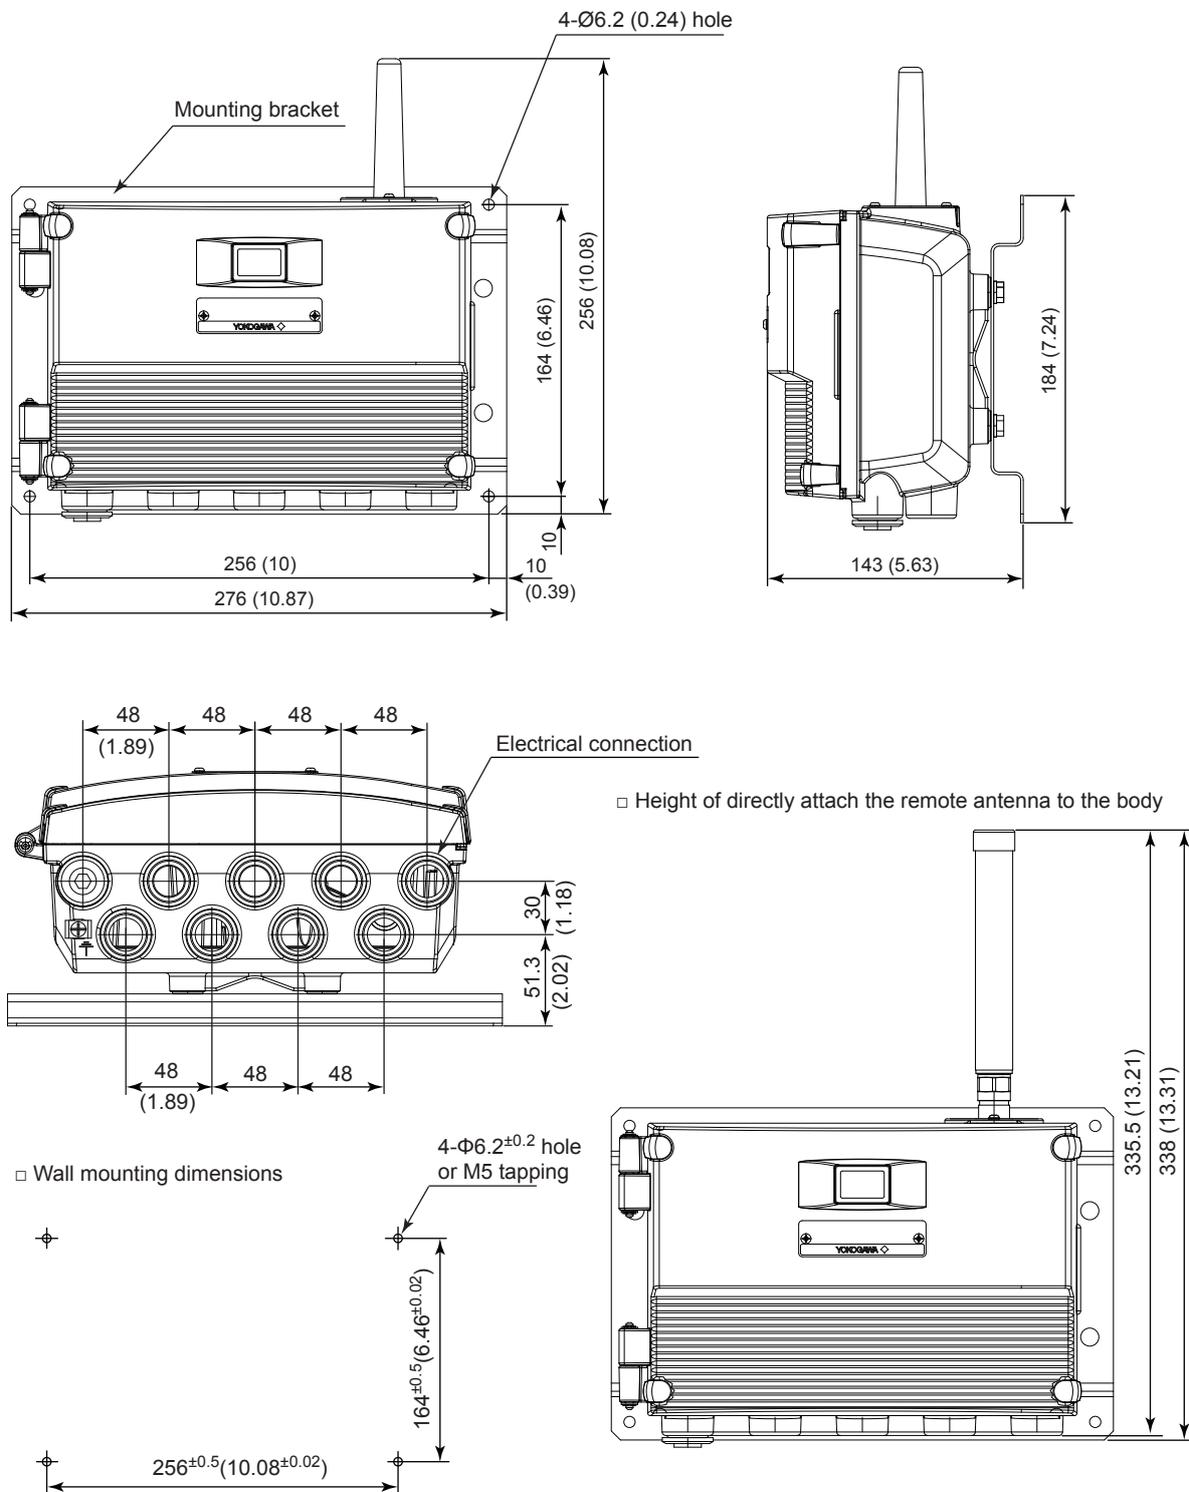

If not specified, the tolerance is ±3%. However, in cases of less than 10 mm, the tolerance is ±3 mm.

● Remote antenna bracket


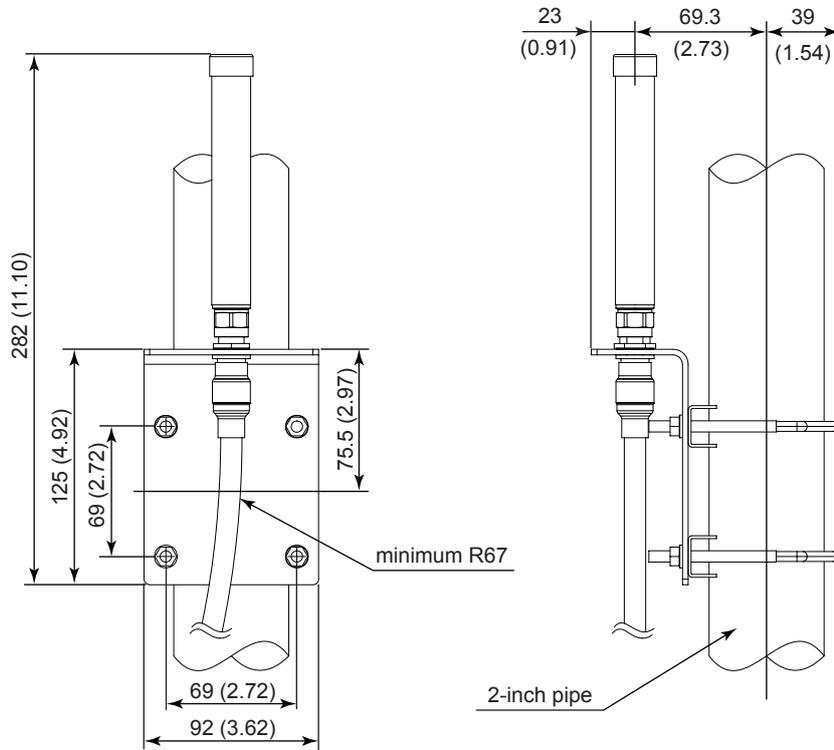


● Remote antenna

- Antenna
  - Antenna
  - \* Non-direction antenna
  - \* Gain : +2 dBi
- Remote antenna
  - High-frequency coaxial cable
  - \* Sheath dia : 11.11mm

<Without arrester>

<With arrester>

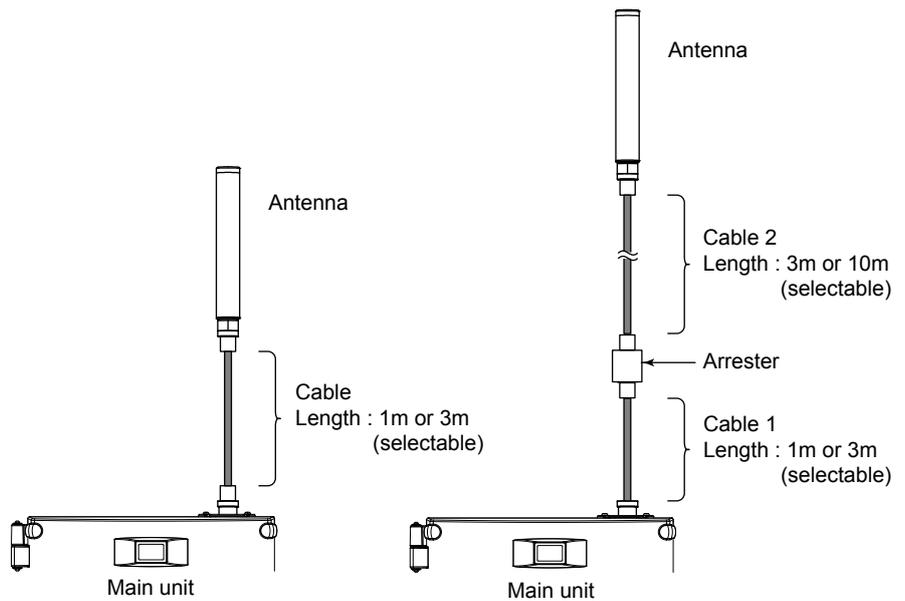

If not specified, the tolerance is  $\pm 3\%$ . However, in cases of less than 10 mm, the tolerance is  $\pm 3$  mm.

- Minimum bend radius of antenna cable

