

S24 Tapered 0.260" Bore Thermowell

Model Code


S24 - T1 - T2 - T3

| S24 | Tapered - 0.260" Bore - Threaded | | |
|-------|----------------------------------|------------|-----------|
| T1 | Process Connection | "A" (Root) | "B" (Tip) |
| 1/2 | 1/2" NPT | 0.625" | 0.500" |
| 3/4 | 3/4" NPT | 0.875" | 0.750" |
| 1 | 1" NPT | 1.063" | 0.750" |
| Other | Consult factory | | |

| T2 | Material | | |
|-----|---------------------|--------------------|-------------------|
| 304 | 304/304L stainless | 800 | Incoloy 800 |
| 316 | 316/316L stainless | A105 | A105 carbon steel |
| 310 | 310 stainless steel | LF2 | A350 LF2 |
| 600 | Inconel 600 | HAC | Hastelloy C276 |
| 625 | Inconel 625 | Other ² | Consult factory |

| T3 | Specify "U" Length (inches) |
|----------|-----------------------------|
| "inches" | Specify length in inches |

Outline & Dimensions

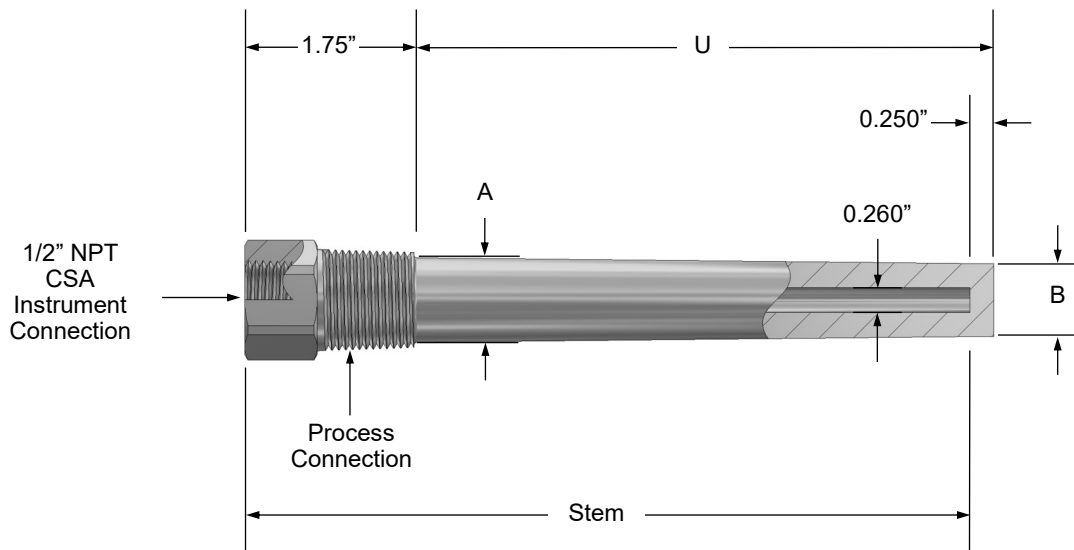

Special option codes specified as come complete with (c/w) thermowell if required

| Code | Description |
|------|-----------------------------------|
| SSPC | Stainless steel plug and chain |
| BRPC | Brass plug and chain |
| OVRL | Overlay (details to be specified) |

NOTES:

- Part number example: S24-3/4-316-2.5 or S24-1/2-316-1.5 c/w SSPC
- Canadian Registration Number (CRN) available for most common alloys, consult factory

