


SD 77J06Y61-01EN


Unit: mm

External Dimensions

DC Power Supply (RVV-31)

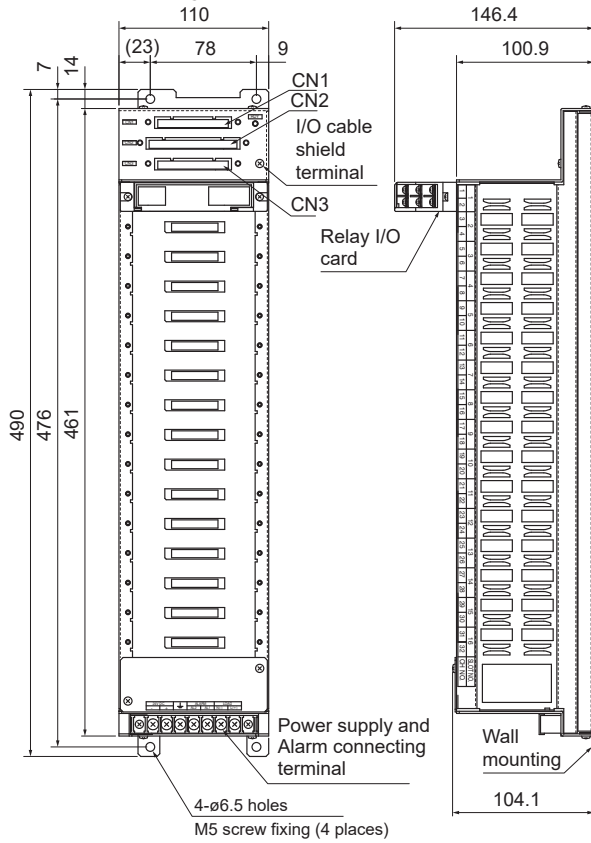

AC Power Supply (RVV-11, RVV-21)

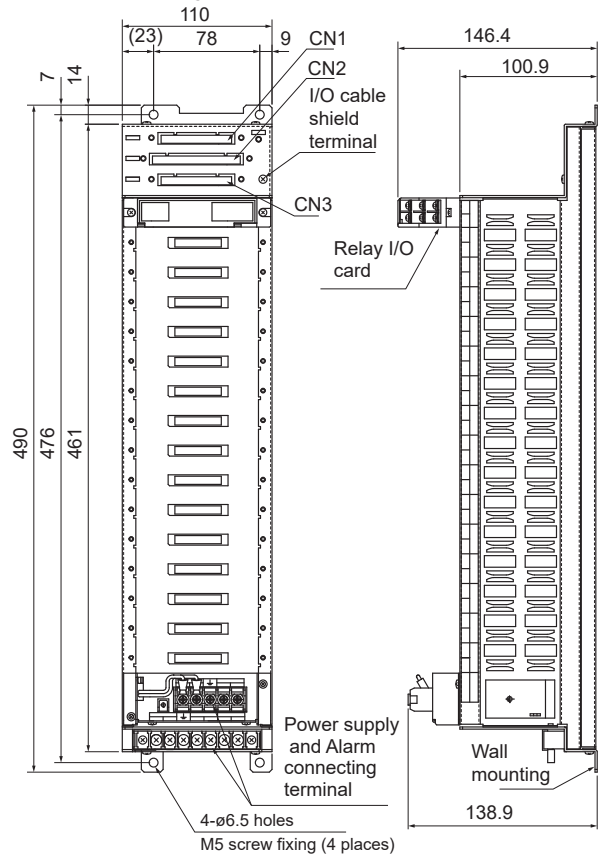

Normal Allowable Deviation= ± (Value of JIS B 0401-2016 tolerance grade IT18) / 2

Terminal Assignments

DC Power Supply (RYV-31)

Screw: M4



Terminal No.	Terminal symbol	RYV-31
1	L (+)	Voltage contact output power supply 125 V AC/DC or less
2	N (-)	
3	AL1	Relay I/O card fuse break alarm
4	AL2	
5	\perp	Relay I/O card power supply 24 V DC \pm 10%, 1.5 A
6	+	
7	-	

AC Power Supply (RYV-11, RYV-21) (Style S2.0)

Upper

(Screw:

M3.5)



Lower

(Screw: M4)



Terminal No.		Terminal symbol	RYV-11	RYV-21		
Upper	Lower					
	1	L (+)	Voltage contact output power supply 125 V AC/DC or less			
	2	N (-)				
	3	AL1	Relay I/O card fuse break alarm			
	4	AL2				
	5	\perp	100-120 V AC (-15%, +10%) 50 / 60 Hz 1 A			
6		N			200-240 V AC (-15%, +10%) 50 / 60 Hz 0.5 A	
7		L				
8		\perp				

Note: For style S1.0, the specifications of the upper terminal are different as shown below.

- Screw M4
- Terminal Assignments

Terminal No.	Terminal symbol
6	L
7	N