

SL34 Tapered 0.385" Bore Lag Thermowell

Model Code

SL34 - T1 - T2 - T3 - T4

SL34 Tapered - 0.385" Bore - Lag - Threaded


T1	Process Connection	"A" (Root)	"B" (Tip)
3/4	3/4" NPT	0.875"	0.750"
1	1" NPT	1.063"	0.750"
Other	Consult factory		

T2	Material
304	304/304L stainless 800 Incoloy 800
316	316/316L stainless A105 A105 carbon steel
310	310 stainless steel LF2 A350 LF2
600	Inconel 600 HAC Hastelloy C276
625	Inconel 625 Other ² Consult factory

T3	Specify "H" Head Length (inches)
"inches"	Specify length in inches (minimum 1.75")

T4	Specify "U" Length (inches)
"inches"	Specify length in inches

Outline & Dimensions

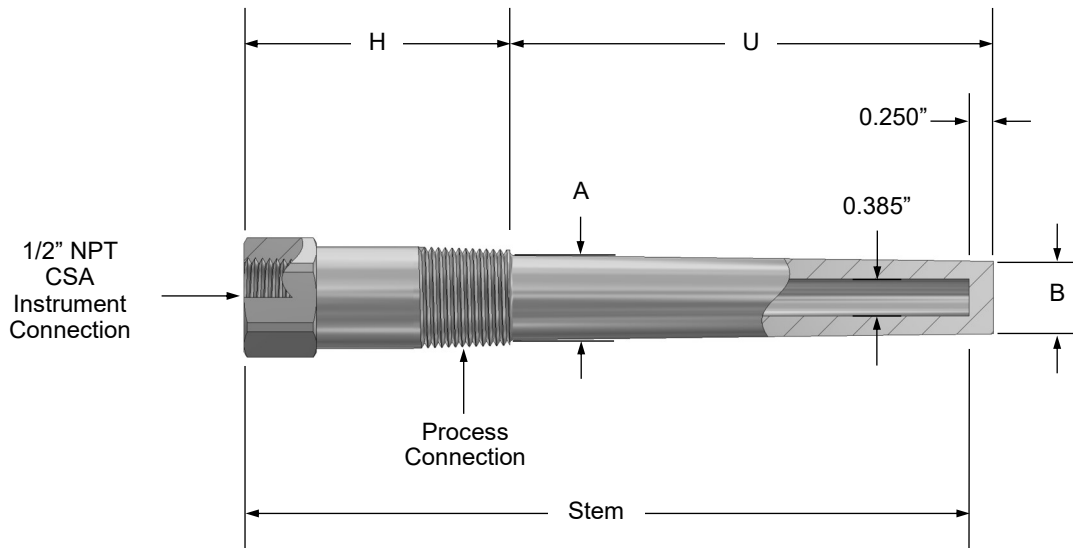

Special option codes specified as come complete with (c/w) thermowell if required

Code	Description
SSPC	Stainless steel plug and chain
BRPC	Brass plug and chain
OVRL	Overlay (details to be specified)

NOTES:

1. Part number example: SL34-3/4-316-2.75-2.5 or SL34-3/4-316-2.75-2.5 c/w SSPC
2. Canadian Registration Number (CRN) available for most common alloys, consult factory

