

General Specifications

X017/X018 P-Rack

JUXTA

GENERAL

P-Rack is connector type nest to connect direct with DCS.

X017 is used to store 8 E/P (PH10/Z), 8 P/E (PF1/Z) Transducers and 1 Power Supply Unit (FPSU-14/24). Upper units connect with YOKOGAWA MAC2 Card.


X018 is used to store upto 16 E/P (PH10/Z) or P/E (PF1/Z) transducers and 1 Power Supply Unit (FPSU-14/24). Upper units connect with YOKOGAWA VM1, VM2, VM4 Cards.

X017/AS
Type
(Connect with MAC2 card)
Units to mount
(Specify combination of Transducers)

X018/AS
Type
(Connect with VM1, VM2, VM4 cards)
Units to mount
(Specify combination of Transducers)

Standard Performance	
Insulation resistance	Over 20MΩ (500V DC) between terminals (pin & power terminal)~case and terminal(pin)~terminal(pin)
Withstand voltage	1000V AC/minute between terminals (pin & power terminal)~case 500V AC/minute between terminal(pin)~terminal(pin)
Ambient temp. and humidity	0~50℃, 45~85%RH
Power voltage	24V DC±10%
Current dissipation	About 1.6A Max.
Mounting & Shape	
Connecting cable	CN1, CN2 - use KS1 cable (X018) CN3 - use KS2 cable (X017)
Paint	Black
Weight	5.0kg (except JUXTA)

Unit : mm

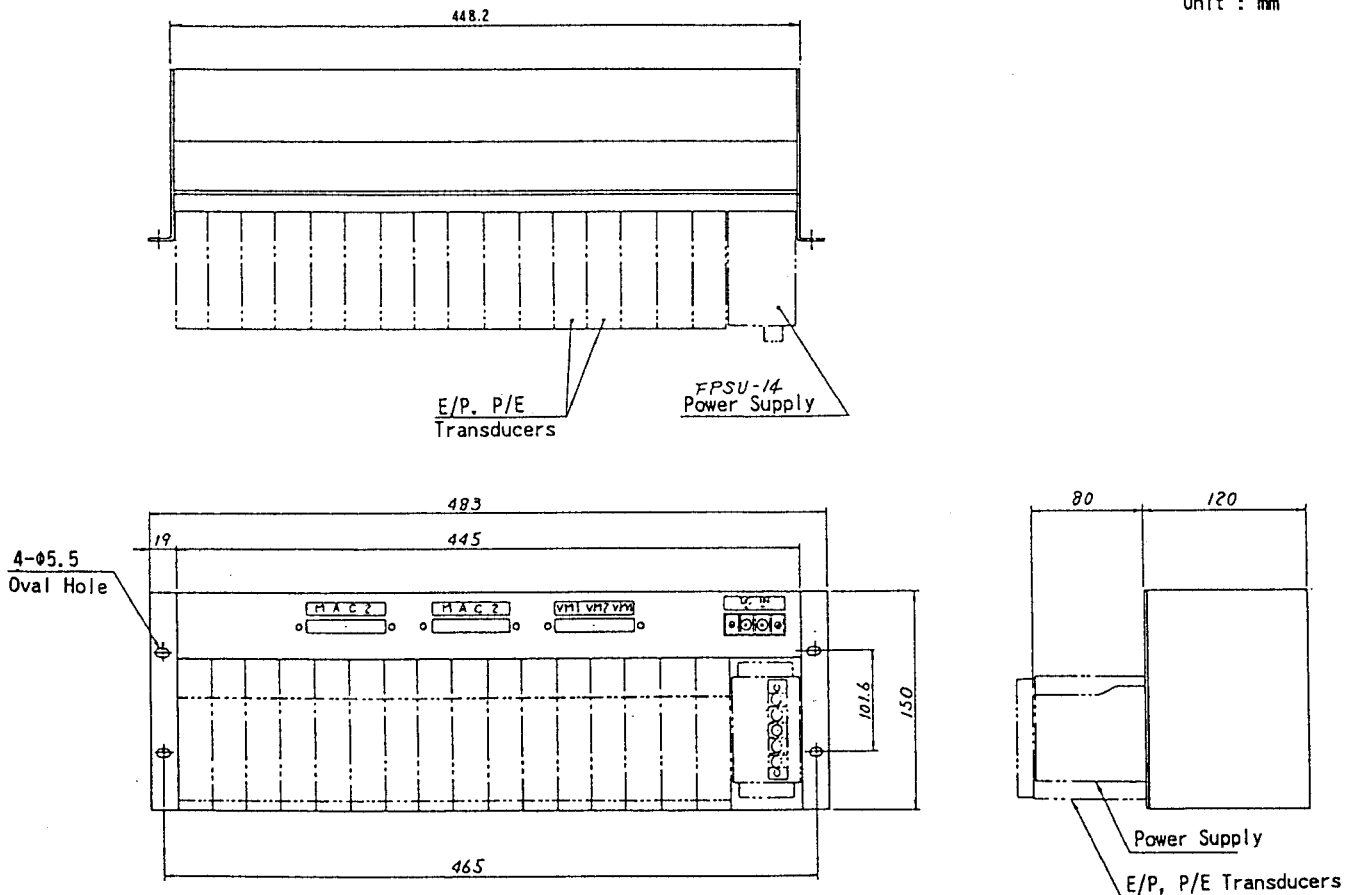

Subject to change without notice for grade up quality and performance

GS X017/X018-01E